


# Bus protocol Cordset



## TwoSided-Moulded Cordset

屏蔽  
Shield




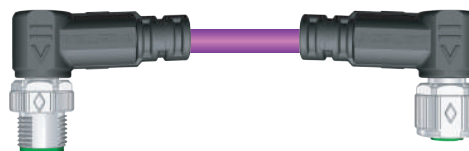


B-CODING



ISO 9001 (2015) QMS

Graph

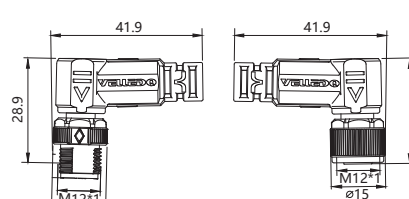

FixedMounting	紫色3m	M12P-BM05T/BF05T-3.0PBGD/VT	M12P-BM05S/BF05S-3.0PBGD/VT
FixedMounting	紫色5m	M12P-BM05T/BF05T-5.0PBGD/VT	M12P-BM05S/BF05S-5.0PBGD/VT
FixedMounting	紫色10m	M12P-BM05T/BF05T-10.0PBGD/VT	M12P-BM05S/BF05S-10.0PBGD/VT
MovableMounting	紫色3m	M12P-BM05T/BF05T-3.0PBYD/VT	M12P-BM05S/BF05S-3.0PBYD/VT
MovableMounting	紫色5m	M12P-BM05T/BF05T-5.0PBYD/VT	M12P-BM05S/BF05S-5.0PBYD/VT
MovableMounting	紫色10m	M12P-BM05T/BF05T-10.0PBYD/VT	M12P-BM05S/BF05S-10.0PBYD/VT
DragChain	紫色3m	M12P-BM05T/BF05T-3.0PBTL/VT	M12P-BM05S/BF05S-3.0PBTL/VT
DragChain	紫色5m	M12P-BM05T/BF05T-5.0PBTL/VT	M12P-BM05S/BF05S-5.0PBTL/VT
DragChain	紫色10m	M12P-BM05T/BF05T-10.0PBTL/VT	M12P-BM05S/BF05S-10.0PBTL/VT

Length/Material Could be customized according to different enviroment ,like extrame tempreature and acid/alkali

Voltage	48 V AC	60 V DC
电流	4A	
Core cross-section	1*2*19AWG	
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	
SignalType	PROFIBUS	12Mbps(最长100M)

