

Bus protocol Cordset



OneSided Moulded Cable




CANopen



ISO 9001 (2015) QMS

Graph

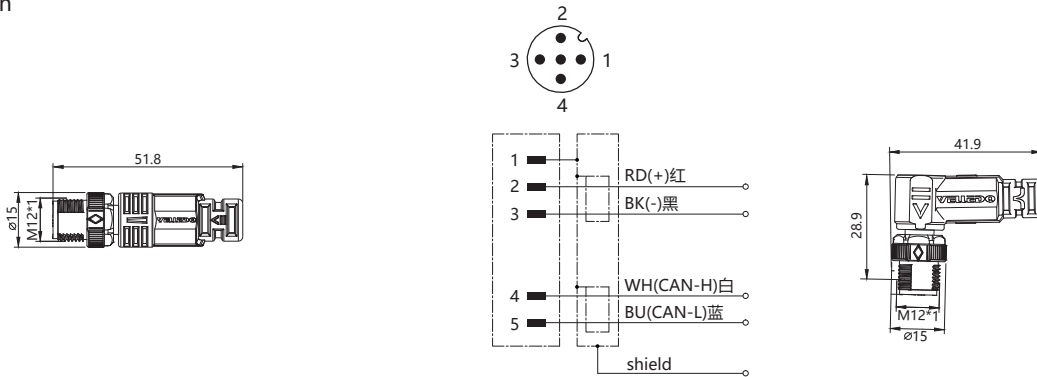

FixedMounting	黑色3m	M12P-M05T-3.0DNGD/BK	M12P-M05S-3.0DNGD/BK	Standing goods
FixedMounting	黑色5m	M12P-M05T-5.0DNGD/BK	M12P-M05S-5.0DNGD/BK	
FixedMounting	黑色10m	M12P-M05T-10.0DNGD/BK	M12P-M05S-10.0DNGD/BK	
MovableMounting	黑色3m	M12P-M05T-3.0DNYD/BK	M12P-M05S-3.0DNYD/BK	
MovableMounting	黑色5m	M12P-M05T-5.0DNYD/BK	M12P-M05S-5.0DNYD/BK	
MovableMounting	黑色10m	M12P-M05T-10.0DNYD/BK	M12P-M05S-10.0DNYD/BK	
DragChain	黑色3m	M12P-M05T-3.0DN TL/BK	M12P-M05S-3.0DN TL/BK	
DragChain	黑色5m	M12P-M05T-5.0DN TL/BK	M12P-M05S-5.0DN TL/BK	
DragChain	黑色10m	M12P-M05T-10.0DN TL/BK	M12P-M05S-10.0DN TL/BK	

Length/Material Could be customized according to different enviroment ,like extrame temperture and acid/alkali

Voltage	48 V AC	60 V DC
Core cross-section	2*22AWG+2*24AWG	
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



- DressPack
- Bus Module
- Industrial Switches
- BusCable
- I/O JunctionBox
- M8 Connection
- M12 Connection
- 7/8 Connection
- D-SUB
- AvalePlug
- HeavyDuty Connector
- CableJoint
- CableEntry System
- USBCable
- M23
- Customized Cordset
- BulkCable