

Bus protocol Cordset




OneSided Moulded Cable



ISO 9001 (2015) QMS

Graph

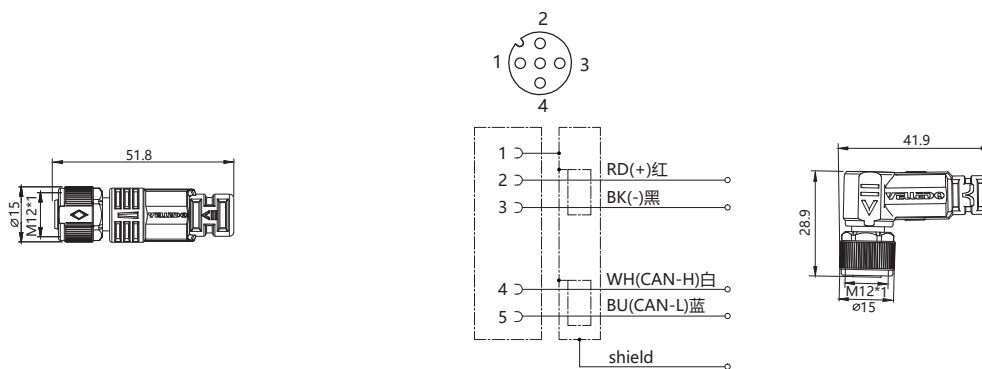

FixedMounting	黑色3m	M12P-F05T-3.0DNGD/BK	M12P-F05S-3.0DNGD/BK	Standing goods
FixedMounting	黑色5m	M12P-F05T-5.0DNGD/BK	M12P-F05S-5.0DNGD/BK	
FixedMounting	黑色10m	M12P-F05T-10.0DNGD/BK	M12P-F05S-10.0DNGD/BK	
MovableMounting	黑色3m	M12P-F05T-3.0DNYD/BK	M12P-F05S-3.0DNYD/BK	
MovableMounting	黑色5m	M12P-F05T-5.0DNYD/BK	M12P-F05S-5.0DNYD/BK	
MovableMounting	黑色10m	M12P-F05T-10.0DNYD/BK	M12P-F05S-10.0DNYD/BK	
DragChain	黑色3m	M12P-F05T-3.0DNTL/BK	M12P-F05S-3.0DNTL/BK	
DragChain	黑色5m	M12P-F05T-5.0DNTL/BK	M12P-F05S-5.0DNTL/BK	
DragChain	黑色10m	M12P-F05T-10.0DNTL/BK	M12P-F05S-10.0DNTL/BK	

Length/Material Could be customized according to different enviroment ,like extrame temperture and acid/alkali

Voltage	48 V AC	60 V DC
Core cross-section	2*22AWG+2*24AWG	
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM