

Bus protocol Cordset




OneSided Moulded Cable



ISO 9001 (2015) QMS

Graph

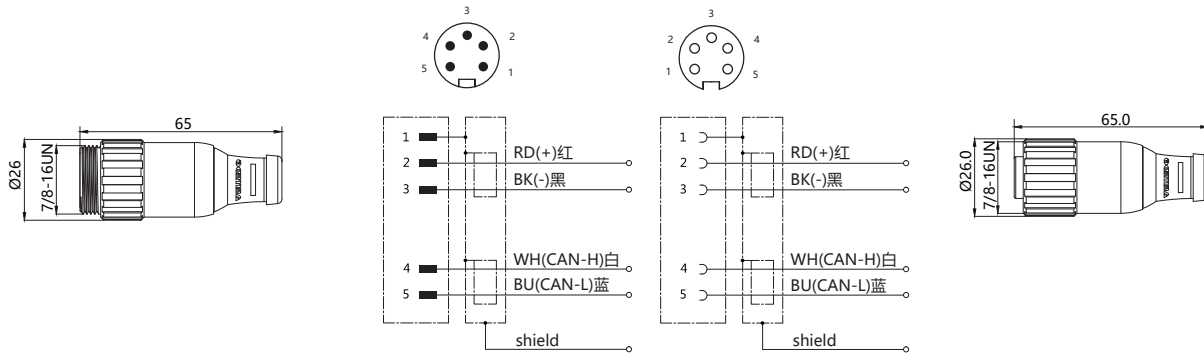

FixedMounting	GR 3m	7/8P-M05T-3.0DNGD/GY	7/8P-F05T-3.0DNGD/GY
FixedMounting	GR 5m	7/8P-M05T-5.0DNGD/GY	7/8P-F05T-5.0DNGD/GY
FixedMounting	GR 10m	7/8P-M05T-10.0DNGD/GY	7/8P-F05T-10.0DNGD/GY
MovableMounting	GR 3m	7/8P-M05T-3.0DNYD/GY	7/8P-F05T-3.0DNYD/GY
MovableMounting	GR 5m	7/8P-M05T-5.0DNYD/GY	7/8P-F05T-5.0DNYD/GY
MovableMounting	GR 10m	7/8P-M05T-10.0DNYD/GY	7/8P-F05T-10.0DNYD/GY
DragChain	GR 3m	7/8P-M05T-3.0DN TL/GY	7/8P-F05T-3.0DN TL/GY
DragChain	GR 5m	7/8P-M05T-5.0DN TL/GY	7/8P-F05T-5.0DN TL/GY
DragChain	GR 10m	7/8P-M05T-10.0DN TL/GY	7/8P-F05T-10.0DN TL/GY

Standing goods

Length/Material Could be customized according to different enviroment ,like extrimte temperture and acid/alkali

Voltage	48 V AC	60 V DC
Core cross-section	2*15AWG+2*18AWG	
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~ +85°C	

