



Bus protocol Cordset



TwoSided-Moulded Cordset

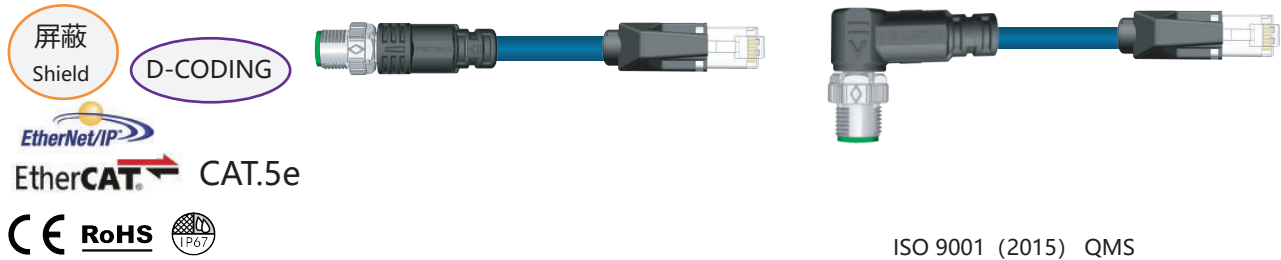

Graph

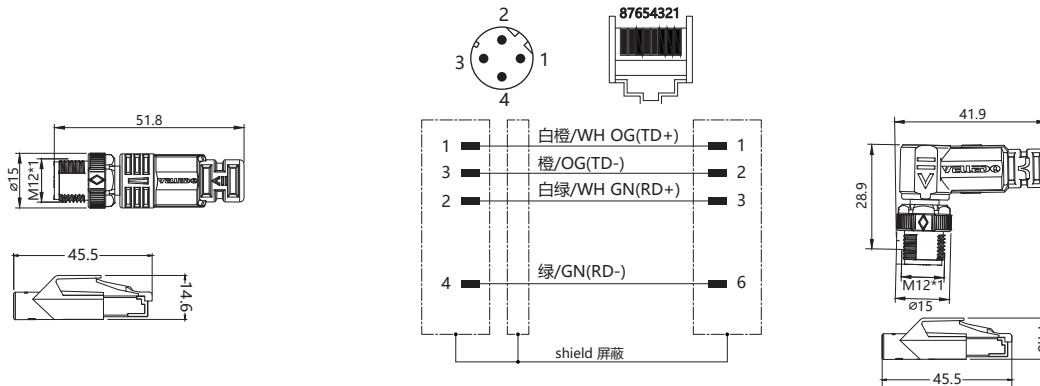

FixedMounting	DK GN 3m	M12P-DM04T/RJ45D4-3.0NIGD/BG	M12P-DM04S/RJ45D4-3.0NIGD/BG
FixedMounting	DK GN 5m	M12P-DM04T/RJ45D4-5.0NIGD/BG	M12P-DM04S/RJ45D4-5.0NIGD/BG
FixedMounting	DK GN 10m	M12P-DM04T/RJ45D4-10.0NIGD/BG	M12P-DM04S/RJ45D4-10.0NIGD/BG
MovableMounting	DK GN 3m	M12P-DM04T/RJ45D4-3.0NIYD/BG	M12P-DM04S/RJ45D4-3.0NIYD/BG
MovableMounting	DK GN 5m	M12P-DM04T/RJ45D4-5.0NIYD/BG	M12P-DM04S/RJ45D4-5.0NIYD/BG
MovableMounting	DK GN 10m	M12P-DM04T/RJ45D4-10.0NIYD/BG	M12P-DM04S/RJ45D4-10.0NIYD/BG
DragChain	DK GN 3m	M12P-DM04T/RJ45D4-3.0NITL/BG	M12P-DM04S/RJ45D4-3.0NITL/BG
DragChain	DK GN 5m	M12P-DM04T/RJ45D4-5.0NITL/BG	M12P-DM04S/RJ45D4-5.0NITL/BG
DragChain	DK GN 10m	M12P-DM04T/RJ45D4-10.0NITL/BG	M12P-DM04S/RJ45D4-10.0NITL/BG

Length/Material Could be customized according to different enviroment ,like extrame temperture and acid/alkali

Voltage	48 V AC	60 V DC
Core cross-section	2*2*26AWG	
ProtectionClass(IEC 60529)	IP67(M12 side)	
Ambient temperature	-25~ +85°C	

