

Bus protocol Cordset




TwoSided-Moulded Cordset



ISO 9001 (2015) QMS

Graph

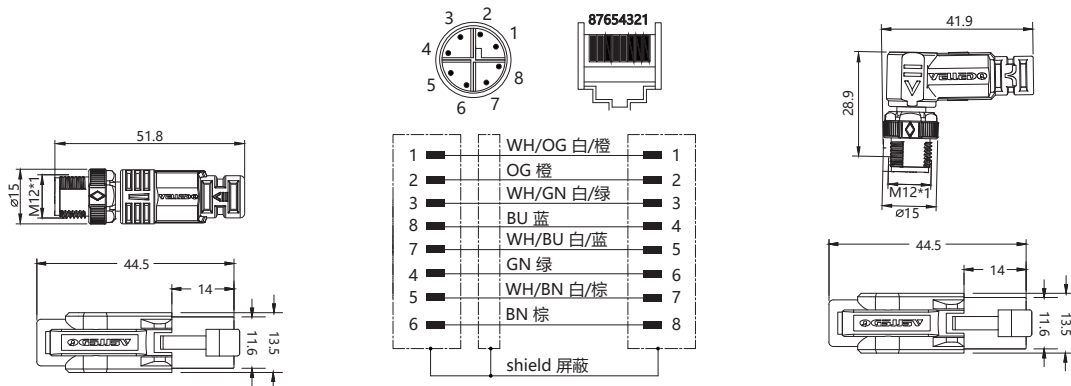

FixedMounting	DK GN 3m	M12P-XM08T/RJ45E8-3.0NIGD/BG	M12P-XM08S/RJ45E8-3.0NIGD/BG
FixedMounting	DK GN 5m	M12P-XM08T/RJ45E8-5.0NIGD/BG	M12P-XM08S/RJ45E8-5.0NIGD/BG
FixedMounting	DK GN 10m	M12P-XM08T/RJ45E8-10.0NIGD/BG	M12P-XM08S/RJ45E8-10.0NIGD/BG
MovableMounting	DK GN 3m	M12P-XM08T/RJ45E8-3.0NIYD/BG	M12P-XM08S/RJ45E8-3.0NIYD/BG
MovableMounting	DK GN 5m	M12P-XM08T/RJ45E8-5.0NIYD/BG	M12P-XM08S/RJ45E8-5.0NIYD/BG
MovableMounting	DK GN 10m	M12P-XM08T/RJ45E8-10.0NIYD/BG	M12P-XM08S/RJ45E8-10.0NIYD/BG
DragChain	DK GN 3m	M12P-XM08T/RJ45E8-3.0NITL/BG	M12P-XM08S/RJ45E8-3.0NITL/BG
DragChain	DK GN 5m	M12P-XM08T/RJ45E8-5.0NITL/BG	M12P-XM08S/RJ45E8-5.0NITL/BG
DragChain	DK GN 10m	M12P-XM08T/RJ45E8-10.0NITL/BG	M12P-XM08S/RJ45E8-10.0NITL/BG

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali

Voltage	48 V AC 60 V DC
Core cross-section	4*2*26AWG
ProtectionClass(IEC 60529)	IP67
Ambient temperature	-25~ +85°C

